

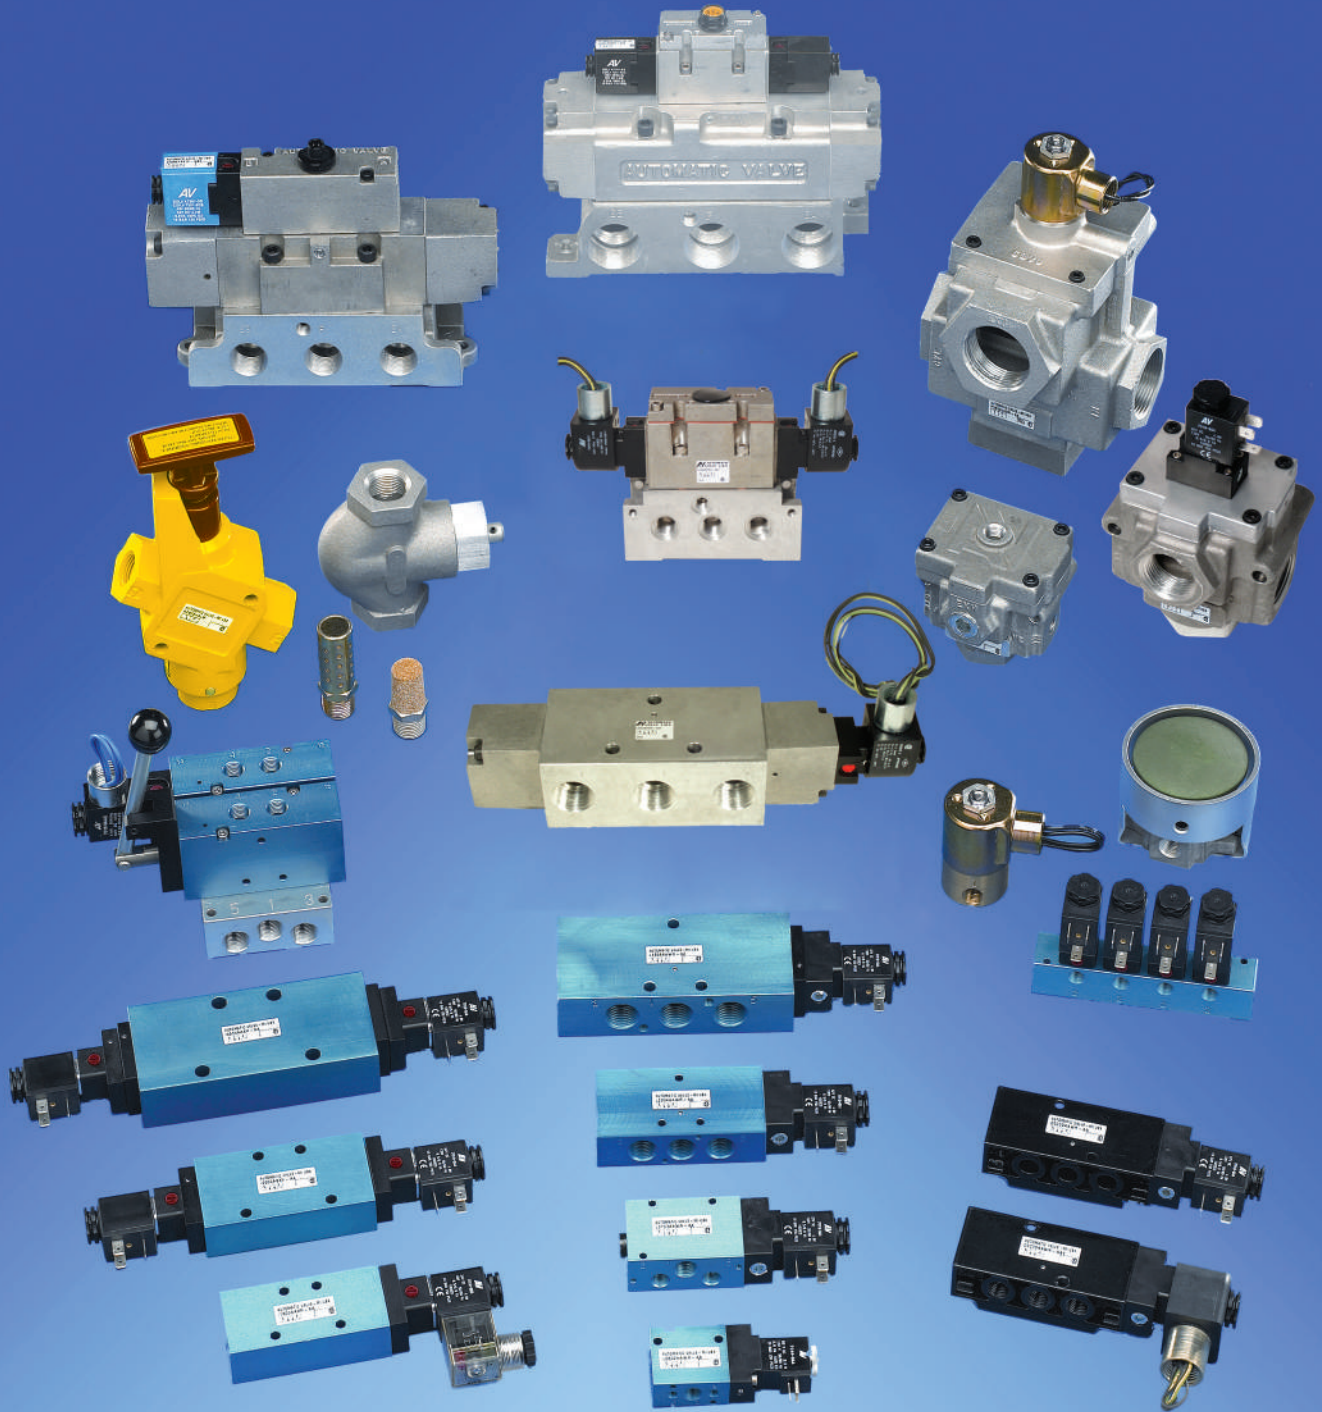
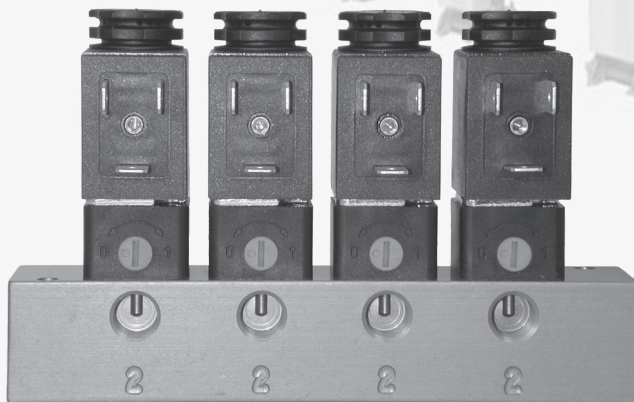


ISO 9001 **AV** *AUTOMATIC VALVE*

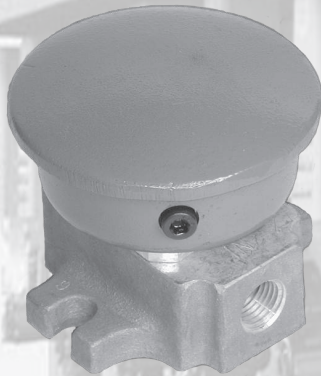

*World Class Pneumatic Solutions*

# AV **AUTOMATIC VALVE**

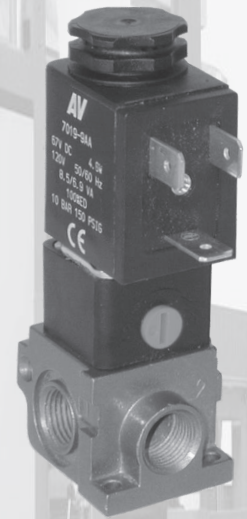


## Direct Operated Solenoid Valves

	Page
Design Features	G2
Specifications	G3
Model Number	G3
Standard Solenoid	G4-G5
Manifold, Standard Solenoid	G4-G5
Bar Stock Solenoid	G6-G7
Manifold, Bar Stock	G6-G7
Manual	G8
Accessories	G8
Options	G9
Configuration Example	G10
Electrical Information	G11

2/2	
3/2	

# Direct Operated Solenoid Valves Design Features

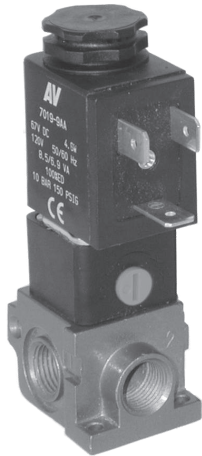

**K0222JAXR-AA**



**K0302JABR**

## Direct Solenoid Valves

- Direct acting solenoid valves for compact, low profile and high performance.
- 2 way or 3 way function.
- Push Turn-Locking Override is standard
- Many options are available to meet your specific requirements: materials, flows, environmental ratings, manifolding. Please consult the factory.
- Specific application needs? Consult the factory. We will build it for you.



**K08: 260A-2G**

## Manual Valves

- Long life poppet construction.
- Corrosion resistant internals.
- Body design simplifies mounting and piping.
- Optional ring guard available to protect against accidental valve actuation.



## Products Certified To:

- CSA - (C22.2 and UL STD 429)
- Factory Mutual - Explosion Proof Environments
- ATEX - Explosion Proof Environments
- CE - EMF and Low Voltage Directives



# Direct Operated Solenoid Valve Specs & Model Numbers

2/2

3/2

Direct Operated Solenoid Valves

## Specifications

Valve Operation		Valve Operation		
 DE-ENERGIZED  ENERGIZED	<b>2/2 Normally Closed</b> <b>De-Energized:</b> Blocks Pressure <b>Energized:</b> Applies Pressure	 DE-ENERGIZED  ENERGIZED	<b>3/2 Normally Closed</b> <b>De-Energized:</b> Exhausts Pressure <b>Energized:</b> Applies Pressure	
 DE-ENERGIZED  ENERGIZED	<b>2/2 Normally Open</b> <b>De-Energized:</b> Applies Pressure <b>Energized:</b> Blocks Pressure	 DE-ENERGIZED  ENERGIZED	<b>3/2 Normally Open</b> <b>De-Energized:</b> Applies Pressure <b>Energized:</b> Exhausts Pressure	
Operating Temperatures	Solenoid Pilot Operated	Buna-N Seals (NBR) (Standard-K08)	Fluoroelastomer Seals (FPM (FKM)) (Standard-K02; Option A-K03&K08)	
	Standard	-18°C to +50°C (0°F to +123°F)	-18°C to +50°C (0°F to +123°F)	
	High Temp Coil (Options CT and T)	-18°C to +82°C (0°F to +180°F)	-18°C to +82°C (0°F to +180°F)	
Operating Pressures	Solenoid Pilot Operated	Inlet Port	External Pilot Port	
	Standard	K02	Not Required	
		AC		100 - 1030 kPa (Vacuum - 150 PSIG)
		DC		100 - 517 kPa (Vacuum - 75 PSIG)
K03	AC	100 - 690 kPa (Vacuum - 100 PSIG)		
	DC	100 - 1030 kPa (Vacuum - 150 PSIG)		
	-	K08		
Filtration & Lubrication	Media - Air Or Inert Gas			
	Air Line Lubrication of Automatic Valve products is not required, but is recommended to maximize service life. Oils should be compatible with seal material, have an ISO 32 viscosity, and have an aniline range between 82°C (180°F) and 99°C (210°F). Filter to 50 microns or better. For temperatures below 40°F, air must be dry to prevent formation of ice. Refer to the Maintenance section of this catalog for recommended lubricants.			

## Model Numbers

Series	Base Type	Port Size	Body Type	Body Design	Operator 1	Operator 2	Voltage <sup>1</sup>	Options*
K02	0 Valve Less Base	0 -	G 3 Way NC H 3 Way NO J 2 Way NC K 2 Way NO	A Single	X Weather-Proof Solenoid	R Spring Return	-AA 110/50, 120/60 -AB 220/50, 240/60, 125VDC -DA 22/50, 24/60, 12VDC -DB 24VDC	C Conduit Coil CT Conduit Coil High Temperature G 18" Flying Leads O Exhaust Nut S 303 Stainless Steel Body (Bar Stock only) SS 316 Stainless Steel Body (Bar Stock only) Y Explosion-Proof Coil Z Explosion-Proof Coil 2 Extended Turn-Locking Override 4 No Override
	2 Inline or Manifold	2 1/8						
	2 Sub-Base	3 1/4						
K03	0 Inline	2 1/8 3 1/4			B Weather-Proof Solenoid D Explosion-Proof Solenoid			A Fluoroelastomer Seals F Potted Solenoid T High Temperature Coil

K08 Series	Body Type	Port Size	Function	Options*
260A	Inline	2 1/4	2 Way NC	A Fluoroelastomer Seals B Blue G Green R Red
360A			3 Way NO	


\* Not all Options are available for all models. Refer to "Options" at the end of this Section for additional information.

<sup>1</sup> Consult the Factory for additional voltages.

2/2

3/2

# Direct Operated Solenoid Valve Standard Solenoid & Manifold

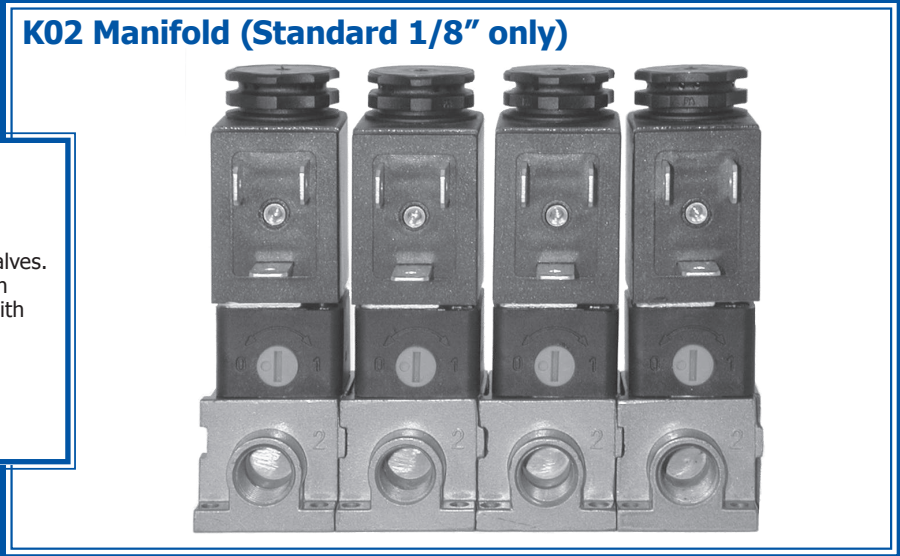

## Manifold Model Number

A K02 manifold consists of individual K02 valves. Each Station mounts to the adjacent Station using a single screw and o-ring (included with each individual K02 valve).  
See chart below for K02 model numbers.  
Shown (right): Quantity 4 K0222JAXR-AA assembled as a manifold


## Model Numbers

Series	Port Size			Flow l/min (Cv)	2/2		3/2		Materials		Wt Kg (lb)
	1	2	3		Normally Closed	Normally Open	Normally Closed	Normally Open	Body	Seal	
<b>K02</b>	1/8	1/8	M5	100 (0.1)	<b>K0222JAXR-**</b>	<b>K0222KAXR-**</b>	<b>K0222GAXR-**</b>	<b>K0222HAXR-**</b>	Aluminum	FPM (FKM)	0,14 (0.3)


Series	Port Size			Flow l/min (Cv)	2/2		3/2		Materials		Wt Kg (lb)
	1	2	3		Normally Closed	Normally Open	Normally Closed	Normally Open	Body	Seal	
<b>K03</b>	1/8	1/8	1/8	200 (0.2)	<b>K0302JABR-**</b>	<b>K0302KABR-**</b>	<b>K0302GABR-**</b>	<b>K0302HABR-**</b>	Aluminum	NBR	0,57 (1.3)
	1/4	1/4	1/4		<b>K0303JABR-**</b>	<b>K0303KABR-**</b>	<b>K0303GABR-**</b>	<b>K0303HABR-**</b>			

\*\* = Coil Voltage Code. Coils also sold separately. Refer to "Electrical Information" at the end of this Section for additional information.

## Dimensional Information

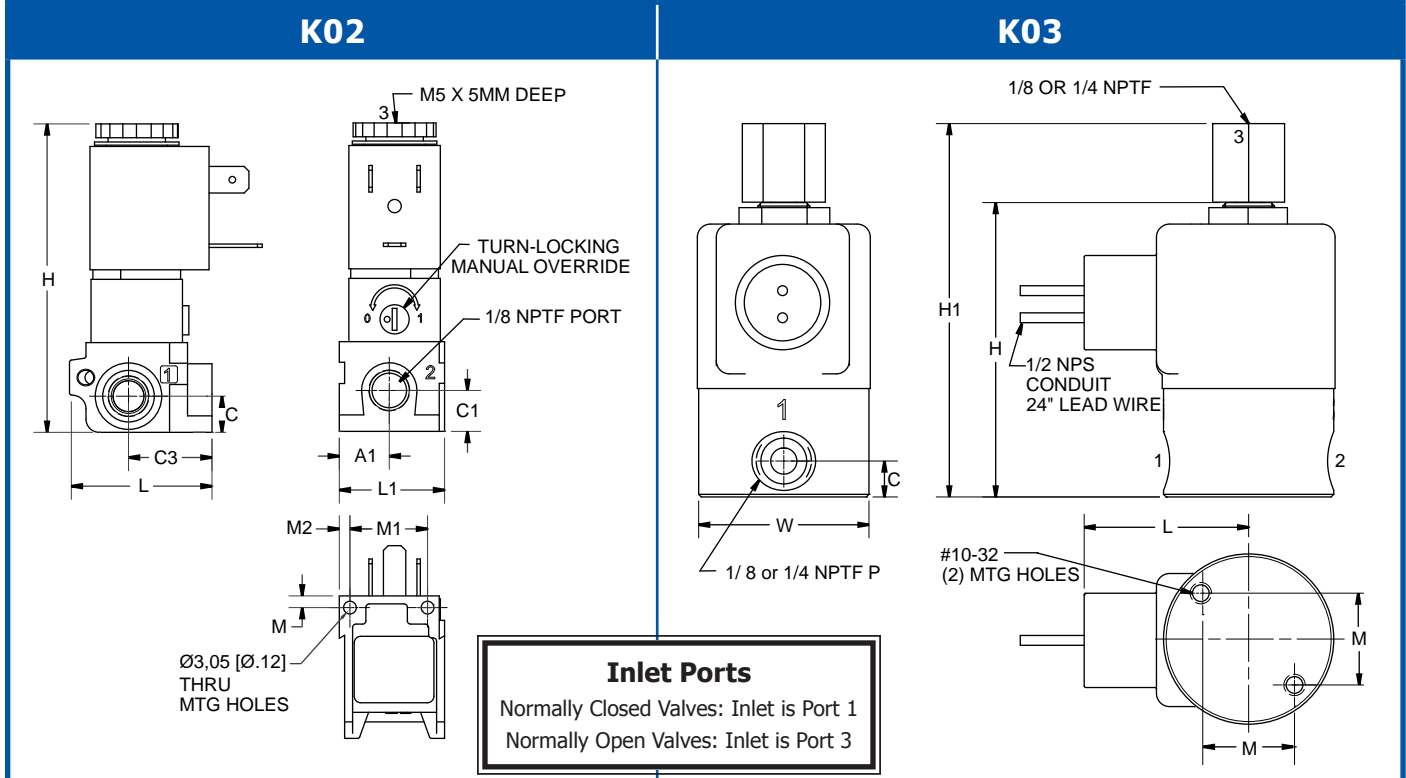

## K02 Manifold

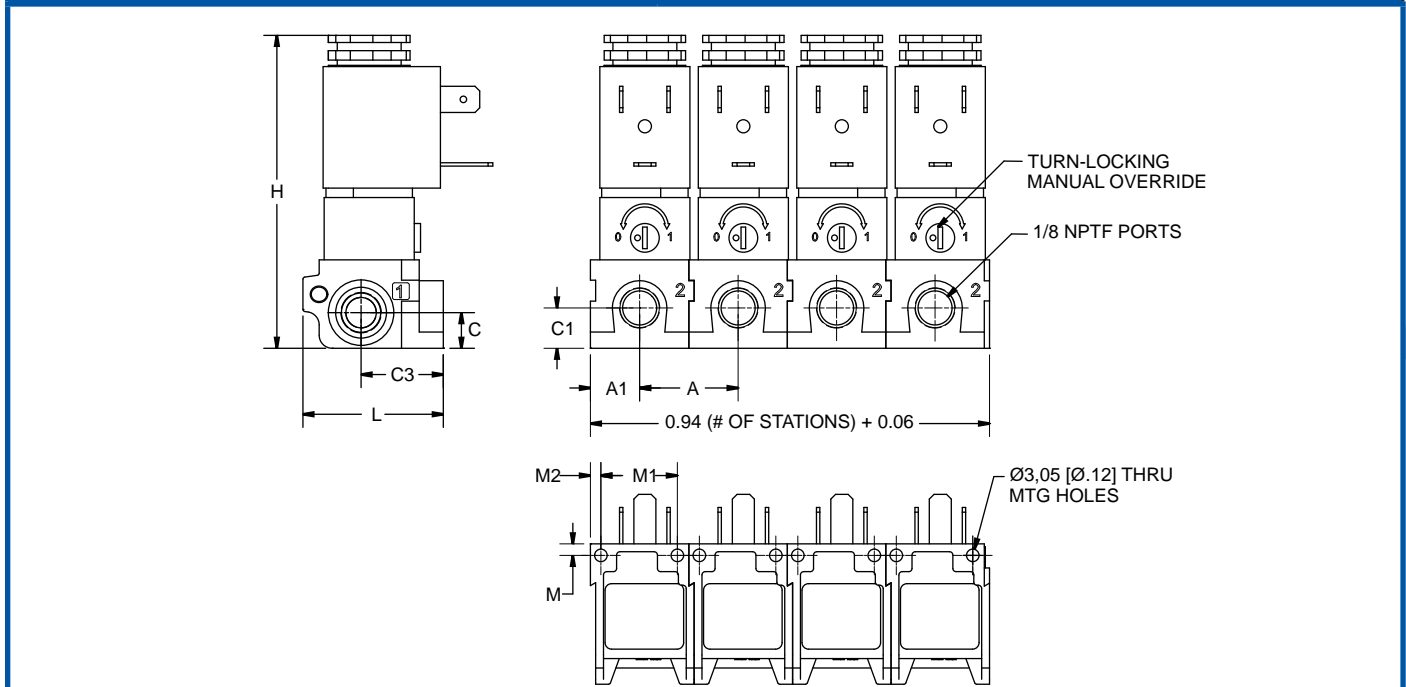

Series	A	A1	C	C1	C3	H	H1	L	L1	M	M1	M2	W
K02	23,88 0.94	11,94 0.47	8,64 0.34	9,78 0.39	19,94 0.79	75,87 2.99	-	33,60 1.32	25,15 0.99	2,79 0.11	18,54 0.73	2,54 0.10	-
K03		-	8,64 0.34	-	-	71,37 2.81	90,53 3.56	39,88 1.57	-	22,25 0.88	-	-	41,28 1.63


Units of Measure: Top - mm, Bottom - inches

2/2

3/2


# Direct Operated Solenoid Valve Bar Stock & Manifold

**K02**

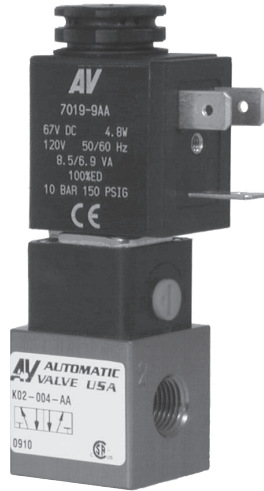


K02-004-AA

**Manifold**

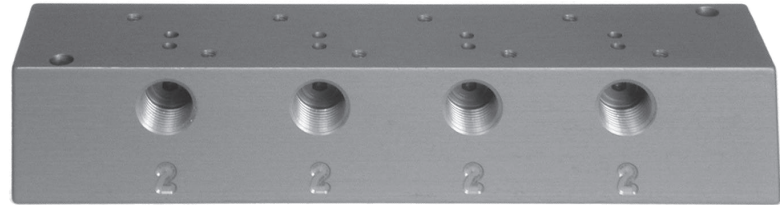

7116-004

**4 K02 on 4 Station Manifold**

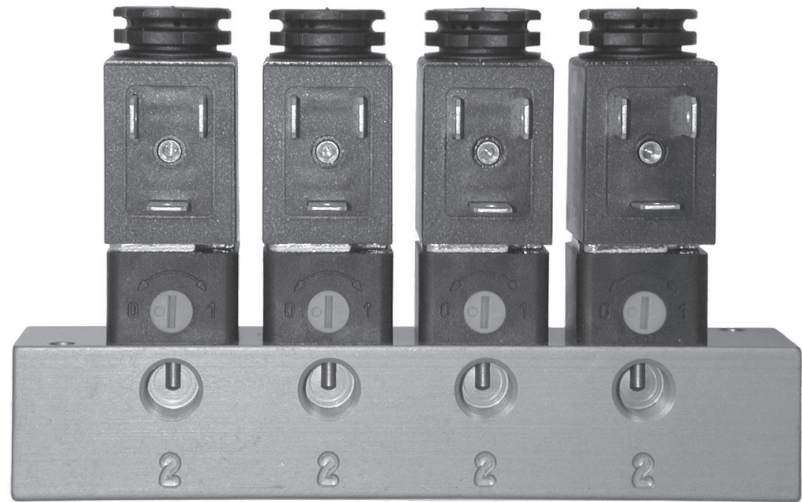

Quantity 4 K0200GAXR-AA on a 7116-004

## Model Numbers

Series	Base Type	Port Size			Flow l/min (Cv)	2/2		3/2		Mat'l		Wt Kg (lb)
		1	2	3		Normally Closed	Normally Open	Normally Closed	Normally Open	Body	Seal	
K02	none	-	-	M5	100 (0.1)	K0200JAXR-**	K0200KAXR-**	K0200GAXR-**	K0200HAXR-**	Aluminum <sup>2</sup>	FPM (FKM)	0,2
	Sub <sup>1</sup>	1/8	1/8			K02-006-**	K02-007-**	K02-004-**	K02-005-**			0,09
	Sub <sup>1</sup>	1/4	1/4			K0223JAXR-**	K0223KAXR-**	K0223GAXR-**	K0223HAXR-**			0,14 (0.3)

\*\* = Coil Voltage Code. Coils also sold separately. Refer to "Electrical Information" at the end of this Section for additional information.

<sup>1</sup> Can not be used on a manifold; order a valve without a base, see K0200\*AXR-\*\* valves above.


<sup>2</sup> Body Available in 303 or 316 Stainless Steel (Bar Stock only). Refer to "Options" at the end of this Section for additional information.

	No. of Stations	Model Number	Ports		Weight kg (lb)	Accessories	
			1	2		Cover Plate	
Base	1	7115-013	1/8	1/8	0,04 (0.09)	-	
		7115-025	1/4	1/4		-	
Manifold*	2	7116-002	1/4	1/8	0,12 (0.26)	A7116-606	
	4	7116-004					0,20 (0.44)
	6	7116-006					0,28 (0.62)
	8	7116-008					0,36 (0.80)


\* Seals and Mounting Hardware included.

## Dimensional Information

### K02 Bar Stock

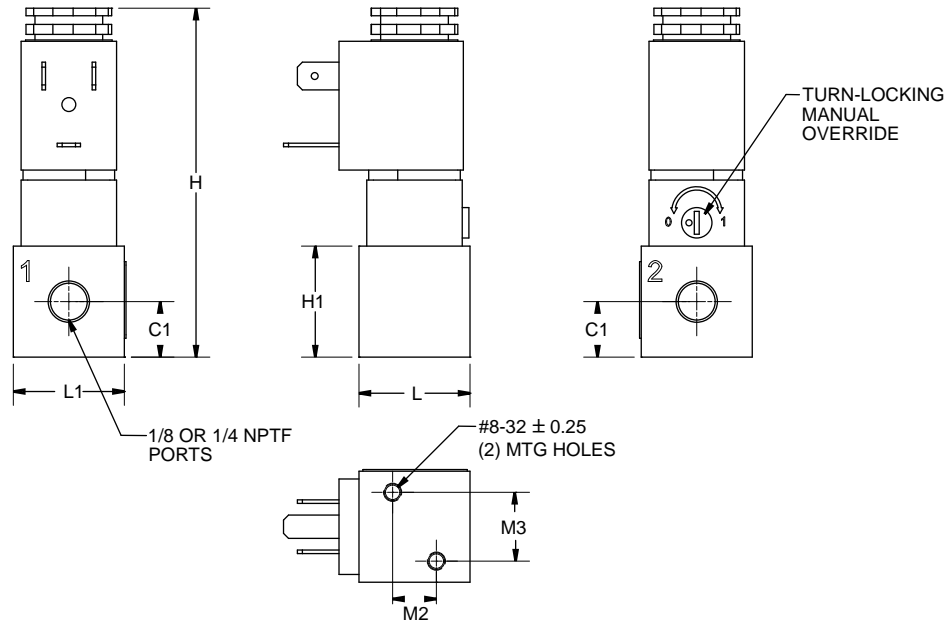

### K02 Bar Stock Manifold

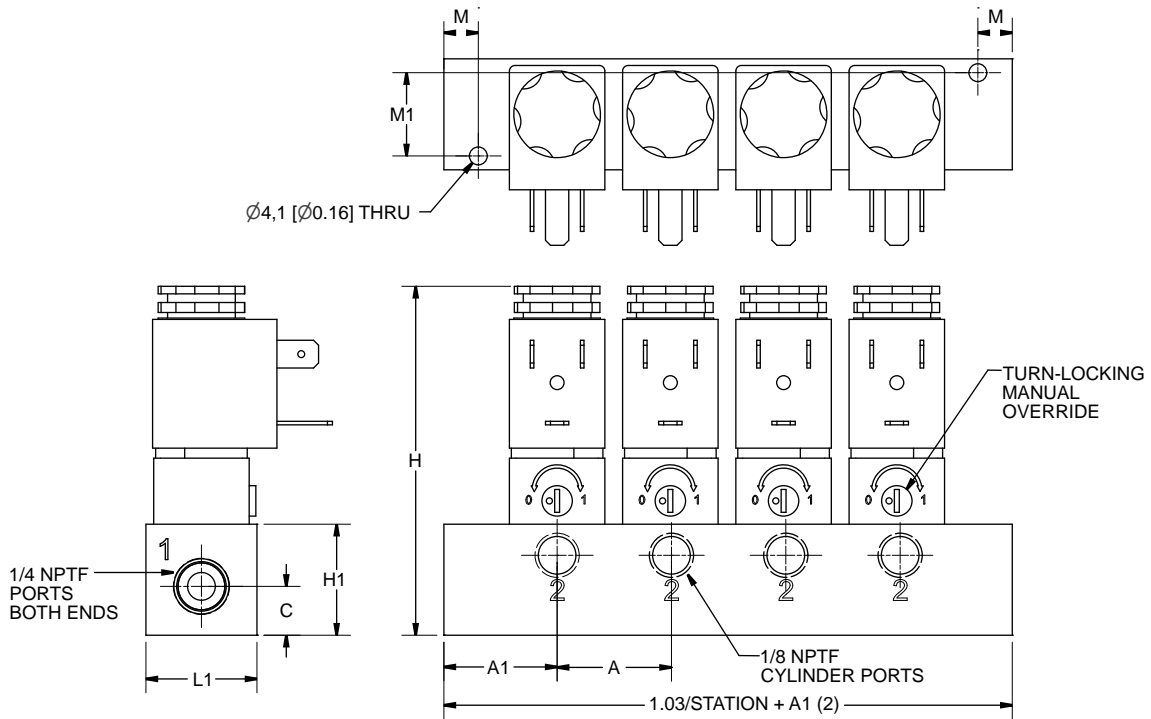

Series	A	A1	C	C1	H	H1	L	L1	M	M1	M2	M3
<b>K02</b>	26,2 1.03	25,9 1.02	11,2 0.44	12,7 0.50	79,8 3.14	25,4 1.00	25,4 1.00	25,4 1.00	7,87 0.31	19,1 0.75	9,91 0.39	15,7 0.62

Units of Measure: Top - mm, Bottom - inches




2/2

3/2

# Direct Operated Solenoid Valve Manual & Accessories


**K08**

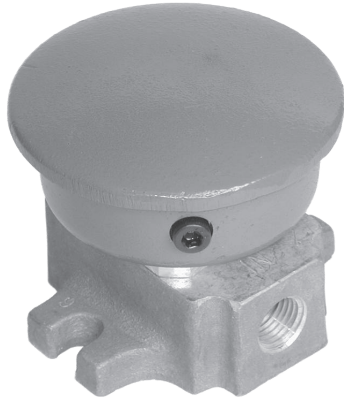

260A-2G

**Guard**

**Part Number  
6098**

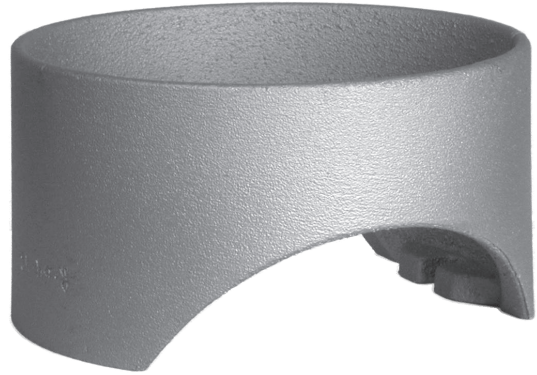


Air Pressure	Hand Force
20 lb	4 lb
40 lb	6 lb
60 lb	8 lb
80 lb	9 lb
100 lb	10 lb

## Model Numbers

Series	Port Size	Port Loc'n	Flow l/min (Cv)	2/2	3/2	Materials		Wt Kg (lb)
						Body	Seal	
K08	1/4	Side	790 (0.8)	<b>260A-2</b>	<b>360A-2</b>	Aluminum	NBR	0,4 (0,9)

## Dimensional Information

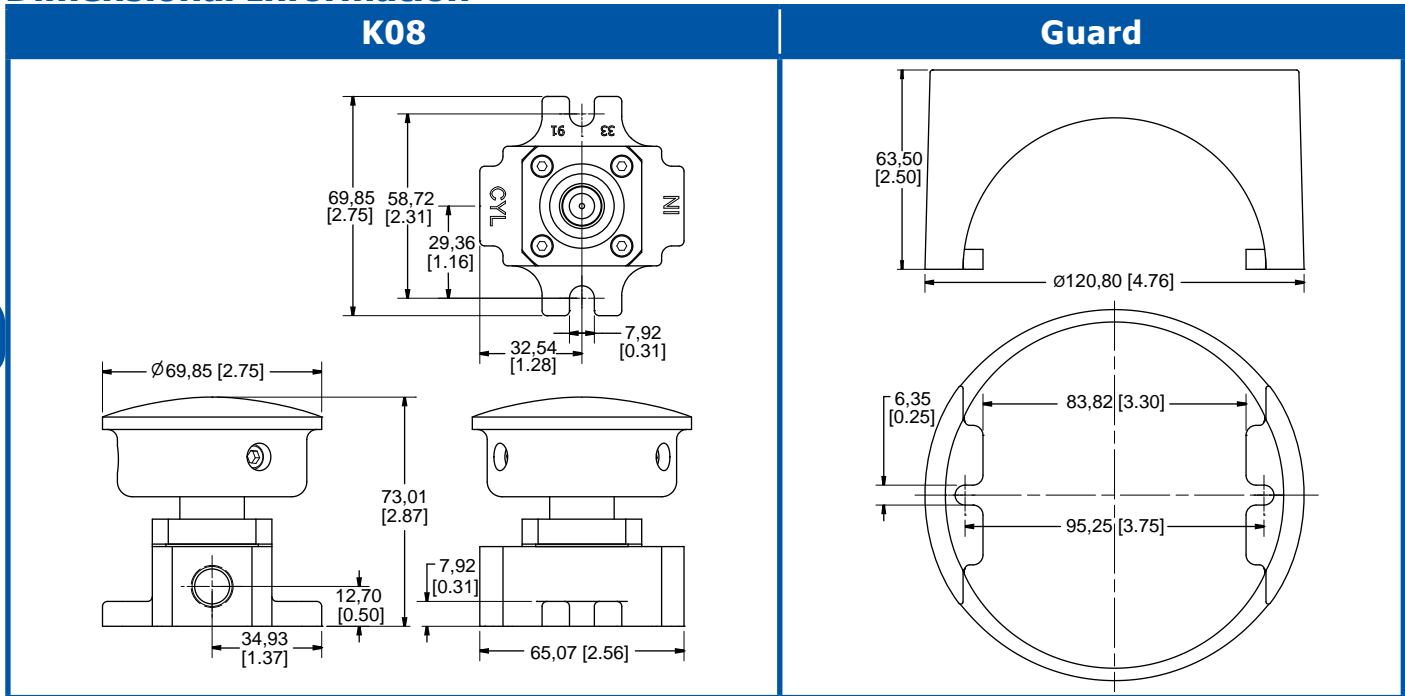

## K08 Accessories

Part Number	Description
6098	<b>Guard</b> Ring type shield used to prevent inadvertant valve actuation.




# Direct Operated Solenoid Valve Options

2/2 

3/2 

## K02 Options (Add the suffix to the end of the model number in alpha-numeric order)

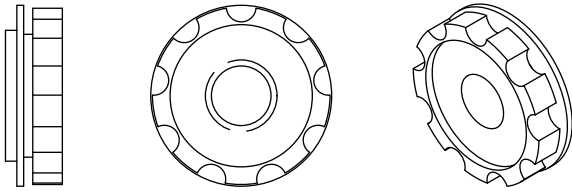

Suffix	Option	Description
C	Conduit Coil	Refer to the "Electrical Information" page in this section for details.
CT	Conduit Coil High Temperature	Refer to the "Electrical Information" page in this section for details.
G	Coil With 18" Leads	Refer to the "Electrical Information" page in this section for details.
O	Exhaust Nut	Open-top retainer nut for access to solenoid stem (K02 Only). 
S	303 Stainless Steel	303 Stainless Steel body, all other external parts corrosion resistant; for corrosive environment applications. (K02 Bar Stock Only)
SS	316 Stainless Steel	316 Stainless Steel body, all other external parts corrosion resistant; for corrosive environment applications. (K02 Bar Stock Only)
Y	Explosion-Proof Coil (CSA, FM)	Refer to the "Electrical Information" page in this section for details.
Z	Explosion-Proof Coil (Atex, PTB)	Refer to the "Electrical Information" page in this section for details.
2	Extended Turn-Locking Override	Solenoid cap provides an extended override that is turned to lock in the "on" position.
4	No Override	Solenoid cap does not provide a manual override.

## K03 Options (Add the suffix to the end of the model number in alpha-numeric order)

Suffix	Option	Description
A	Fluoroelastomer Seals	For applications where fluid media or ambient conditions are not compatible with nitrile seals. <i>Note: Fluorocarbon seals do not increase the effective temperature range of the valve. For high temperature applications, consult the factory.</i>
T	High Temperature Coil	Refer to the "Electrical Information" page in this section for details.
















## K08 Options (Add the suffix to the end of the model number in alpha-numeric order)

Suffix	Option	Description
A	Fluoroelastomer Seals	For applications where fluid media or ambient conditions are not compatible with nitrile seals. <i>Note: Fluorocarbon seals do not increase the effective temperature range of the valve. For high temperature applications, consult the factory.</i>
B	Blue	Button is Blue
G	Green	Button is Green
R	Red	Button is Red

2/2   
 3/2 

# Direct Operated Solenoid Valve Configuration Example



Valve With W-Solenoid Cap	+	Coil	=	Valve With Coil
 <b>K0223GAXR</b>	+	 NEMA 4x with DIN 43650 Form B Connection <b>7019-9**</b>	=	 <b>K0223GAXR-**</b>
 <b>K0223GAXR</b>	+	 NEMA 4x with 18" Leads <b>7019-9**G</b>	=	 <b>K0223GAXR-**G</b>
 <b>K0223GAXR</b>	+	 NEMA 4x 1/2" Conduit with 30" Leads <b>7019-9**C</b>	=	 <b>K0223GAXR-**C</b>
 <b>K0223GAXR</b>	+	 Explosion-Proof 1/2" Conduit with 24" Leads <b>7019-9**Y</b>	=	 <b>K0223GAXR-**Y</b>
 <b>K0223GAXR</b>	+	 ATEX Explosion-Proof with 39" Cable <b>7152-9**</b>	=	 <b>K0223GAXR-**Z</b>

G



# Direct Operated Solenoid Valve Electrical Information

2/2

3/2

Direct Operated Solenoid Valves

## Part Numbers

Description	Series	Operator Type	Instructions	Wt. Kg (lb)	Coil Part Number **=Voltage
<b>Weather-Proof</b> DIN 43650 Industrial Form B Connection NEMA 4X	K02	X	Order coil separately (specify voltage code from below)	0,05 (0.12)	<b>7019-9**</b>
<b>Weather-Proof</b> 18" Leads NEMA 4X	K02	X	Order coil separately (specify voltage code from below)	0,05 (0.12)	<b>7019-9**G</b>
<b>Weather-Proof</b> 1/2" Conduit with 30" Leads NEMA 4X	K02	X	Order coil separately (specify voltage code from below)	0,05 (0.12)	<b>7019-9**C</b> <b>7019-9**CT</b> (high temp 82°C max)
<b>Explosion-Proof</b> 1/2" Conduit with 24" Leads CSA & FM Approved CL. I; Zone 1 Ex m II T4; AEx m II CL. I; Div.1; GR. A, B, C, D CL. II; GR. E, F, G CL. III T4 Ta=-20°C to +60°C NEMA 4, 4X, 7C, 7D, 9	K02	X	Order coil separately (specify voltage code from below)	0,20 (0.44)	<b>7019-9**Y</b>
<b>Explosion-Proof</b> 3m Cable & Strain Relief Ex m II T5 PTB 03 ATEX2018 X Ex II 2 G EEx m II T5 Ex II 2 D IP65 T95°C	K02	Z	Order coil separately (specify voltage code from below)	0,36 (0.78)	<b>7152-9**</b>
<b>Weather-Proof</b> 1/2" Conduit with 24" Leads NEMA 4x	K03	B	Coil included (specify voltage code from below)	0,27 (0.61)	<b>A5983-**F</b>
<b>Explosioin-Proof</b> 1/2" Conduit with 24" Leads CL. I; Div.2; GR. A & B. CL. I; Div.1; GR. C & D CL. II; Div.1; GR. E, F, G	K03	D	Coil included (specify voltage code from below)	0,48 (1.05)	<b>A6454-**F</b>

## Voltage Codes (Lower wattage options available, consult factory)

K02	Current (Amps)				Resistance (OHMS @ 25°C)				Power (AC=VA, DC=Watts)			
	Inrush		Holding		X		Z		X		Z	
	Operator Type:	X	Z	X	Z	X	Z	X	Z	X	Z	
** Code	Volt. +/-10%	NEMA	Atex	NEMA	Atex	NEMA	Atex	NEMA	Atex	NEMA	Atex	
	4 7,9&Z	4 7,9	Atex	4 7,9	Atex	4 7,9	Atex	4 7,9	Atex	4 7,9	Atex	
DA	24/50 24/60	-	.36 - -	.24 - -	- -	32 - -	- -	6.9 - -	- -	- -	- -	
AA	120/50 120/60	120/60	.08 .10 -	.05 .05 -	- -	840 530 -	- -	6.9 6.5 -	- -	- -	- -	
AB	230/50 230/60	240/60	.04 .05 -	.03 .03 -	- -	3310 2345 -	- -	6.4 6.8 -	- -	- -	- -	
DA	12VDC	12VDC	.38 .38 -	.38 .38 -	- -	32 32 -	- -	4.8 4.5 -	- -	- -	- -	
DB	24VDC	24VDC	.20 .19 .05	.20 .19 .05	- -	121 128 275	- -	4.8 4.5 1.6	- -	- -	- -	
AB	125VDC	-	.04 - -	.04 - -	- -	3310 - -	- -	5.9 - -	- -	- -	- -	

K03	Current (Amps)				Resist. (OHMS @ 25°C)				Power (Watts)			
	Inrush		Holding		B		D		B		D	
	Operator Type:	B	D	B	D	B	D	B	D	B	D	
** Code	Volt. ±10%	NEMA										
	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	4 7,9	
AA	100/50 120/60	120/60	.26 .26	.16 .16	156 156	156 156	8.7 7.3	- -	- -	- -	- -	
AB	208/50 240/60	240/60	.13 .13	.08 .08	636 636	636 636	8.7 7.3	- -	- -	- -	- -	
DA	12VDC	12VDC	.80 .80	.80 .80	15.1 15.1	15.1 15.1	9.5 9.5	- -	- -	- -	- -	
DB	24VDC	24VDC	.39 .39	.39 .39	62 62	62 62	9.5 9.5	- -	- -	- -	- -	

## Connectors (Not polarity dependent)

DIN 43650 Industrial Form B	Maximum Cable Diameter: 9mm (0.35")		Strain Relief with Light		1/2" Conduit without Cord	Molded with 6' Cord	Strain Relief with Light & 6' Cord	
Type	Strain Relief without Cord	100-240 AC 48-120 DC	6-48 AC/DC	1/2" Conduit without Cord	Molded with 6' Cord	100-240 AC 48-120 DC	6-48 AC/DC	
Part Number	<b>7020-001</b>	<b>7020-AA</b>	<b>7020-DB</b>	<b>7039-001</b>	<b>7020-006</b>	<b>7094-006</b>	<b>7094-007</b>	